




VH150, VH200, VH410 & VH410M



Ultraviolet Water Systems from VIQUA

The VIQUA **HOME** family of compact UV systems provide a **reliable** and **economical** way to treat drinking water in virtually any residential application. VIQUA's range of products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from just 5 GPM for a small home or cottage, up to 18 GPM for a larger home or small business.

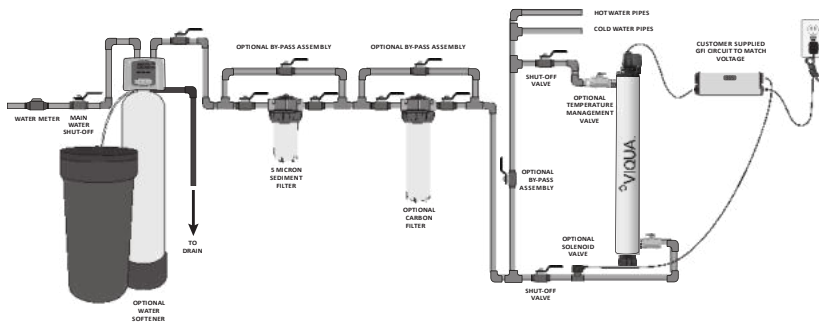

Features of VIQUA UV water systems

- Specially designed and tested Sterilume™ -HO lamps provide consistent and reliable ultraviolet output over the entire life of the lamp (9000 hours) to ensure optimal performance. High output lamps allow for small footprint while providing the same UV performance as a standard output lamp in a longer chamber.
- The system is simple to maintain and service allowing for easy lamp replacement.
- Built with a durable stainless steel chamber to prolong life and eliminate ultraviolet light degradation.
- Safety-Loc™ connector with interlock that ensures power is disconnected before lamp can be removed.
- The controller visually displays the remaining lamp life and will go into alarm if the lamp fails. Monitored systems are equipped with a UV sensor which provides a continuous readout of UV intensity.
- Monitored systems allow for the installation of an optional solenoid valve which will stop the flow of water through the chamber should the UV performance fall below a safe level.

Specifications




MODEL	VH150	VH200	VH410	VH410M
FLOW RATES (@ 95% UVT)				
US Public Health (16 mJ/cm ²)	12 GPM (45 lpm) (2.7 m ³ /hr)	16 GPM (60 lpm) (3.6 m ³ /hr)	34 GPM (130 lpm) (7.8 m ³ /hr)	34 GPM (130 lpm) (7.8 m ³ /hr)
VIQUA Standard (30 mJ/cm ²)	5 GPM (19 lpm) (1.1 m ³ /hr)	9 GPM (34 lpm) (2.0 m ³ /hr)	18 GPM (70 lpm) (4.2 m ³ /hr)	18 GPM (70 lpm) (4.2 m ³ /hr)
NSF/EPA (40 mJ/cm ²)	3.5 GPM (13 lpm) (0.8 m ³ /hr)	7 GPM (26 lpm) (1.6 m ³ /hr)	14 GPM (54 lpm) (3.3 m ³ /hr)	14 GPM (54 lpm) (3.3 m ³ /hr)
DIMENSIONS				
Chamber	13" x 3.5" (33 cm x 8.9 cm)	17.75" x 3.5" (45 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)
Controller	6.8" x 3.2" x 2.5" (17.2 cm x 8.1 cm x 6.4 cm)	6.8" x 3.2" x 2.5" (17.2 cm x 8.1 cm x 6.4 cm)	6.8" x 3.2" x 2.5" (17.2 cm x 8.1 cm x 6.4 cm)	9.25" x 3.25 x 2.5" (24 cm x 8.1 cm x 6.9 cm)
Inlet/Outlet Port Size	Combo 3/4" FNPT / 1" MNPT	3/4" - 1" MNPT COMBO*	3/4" - 1" MNPT COMBO*	3/4" - 1" MNPT COMBO*
Shipping Weight	8 lbs (3.6 kg)	12 lbs (5.4 kg)	17 lbs (7.7 kg)	17 lbs (7.7 kg)
ELECTRICAL				
Voltage	120-240V / 50/60 Hz	120-240V / 50/60 Hz	120-240V / 50/60 Hz	120-240V / 50/60 Hz
Power Consumption	32 W	35 W	60 W	60 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)
Influent Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)
FEATURES				
Visual "Power On"	YES	YES	YES	YES
Chamber Material	304 SS	304 SS	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES	YES	YES
Audible Lamp Life Failure	YES	YES	YES	YES
Audible Lamp Replacement Reminder	YES	YES	YES	YES
UV Sensor	NO	NO	NO	YES

* /2B - BSP

Replacement Parts

S150RL-HO – UV lamp for VH150	QS-001 – quartz sleeve for VH200
S200RL-HO – UV lamp for VH200	QSO-410 – quartz sleeve for VH410 & VH410M
S410RL-HO – UV lamp for VH410 & VH410M	410867 – o-ring for quartz sleeves
QL-150 – quartz sleeve, UV lamp combo pack for VH150	RN-001 – retaining nut for all systems
QL-200 – quartz sleeve, UV lamp combo pack for VH200	RN-001/1 – retaining nut with plug for all systems
QL-410 – quartz sleeve, UV lamp combo pack for VH410 & VH410M	BA-ICE-CL – electronic ICE controller for VH150, VH200, VH410
QSO-150 – quartz sleeve for VH150	BA-ICE-CM – electronic ICE controller for VH410M


VH150, VH200, VH410, & VH410M DOSE CURVES

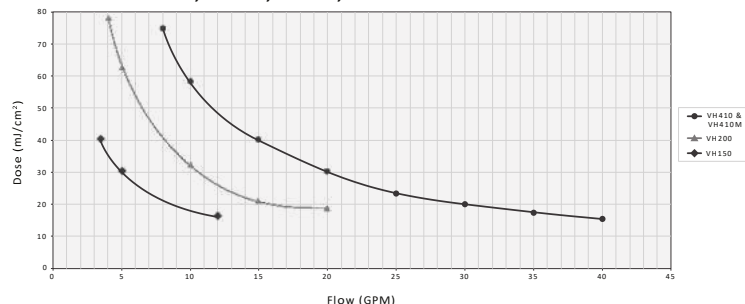

Water Quality Parameters

Hardness < 7 grains (120 mg/L) Iron < 0.3 mg/L Tannins < 0.1 mg/L

Phone: (+84) 98 228 3389
 Website: <https://moitruongcuulong.com/>
 Email: ctmoitruongcuulong@gmail.com
 425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1
 t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN)
 t. +31.73.747.0144 (EUR) info@viqua.com • www.viqua.com





2024 CATALOGUE

2024 CATALOGUE



VIQUA

MST: 0318 391 771

Hotline: +84 98-228-3389

**CÔNG TY TNHH THIẾT BỊ ĐIỆN &
MÔI TRƯỜNG CỬU LONG**

Số tài khoản: 8093 6688 tại Ngân hàng TMCP Á Châu (ACB) - PGD Gò Vấp

<https://CLFVietNam.com>

VietNamCLF@gmail.com

Web:

<https://locnuoccuulong.com>

Email:

CuuLongfilter@gmail.com

<https://moitruongcuulong.com>

Ctmoitruongcuulong@gmail.com

Địa chỉ: 60 Đường 3158A Phạm Thế Hiển, Phường 7, Quận 8, Tp.HCM

Kho: Đường 2F, KCN Vĩnh Lộc, X. Vĩnh Lộc A, H. Bình Chánh, Tp.HCM

Xưởng: Đường Liên ấp 234, xã Vĩnh Lộc A, huyện Bình Chánh, Tp.HCM

VIQUA



**CÔNG TY TNHH THIẾT BỊ ĐIỆN &
MÔI TRƯỜNG CỬU LONG**

MST: 0318 391 771

MÔI TRƯỜNG CỬU LONG



CUNG CẤP

**THIẾT BỊ - VẬT TƯ
XỬ LÝ NƯỚC**



<https://CLFVietNam.com>
<https://locnuoccuulong.com>
<https://moitruongcuulong.com>

2024



<https://CLFVietNam.com>
<https://locnuoccuulong.com>
<https://moitruongcuulong.com>

2024